


EPARENCY FLOOR COATING

Protective coatings for
residential and commercial

EPARENCY

CONCRETE PROTECTION YOU CAN STAND ON

Eparency Coatings is a leading provider of high-performance coatings. We can also custom tailor our coating products to fit the needs of clients across a wide variety of markets.

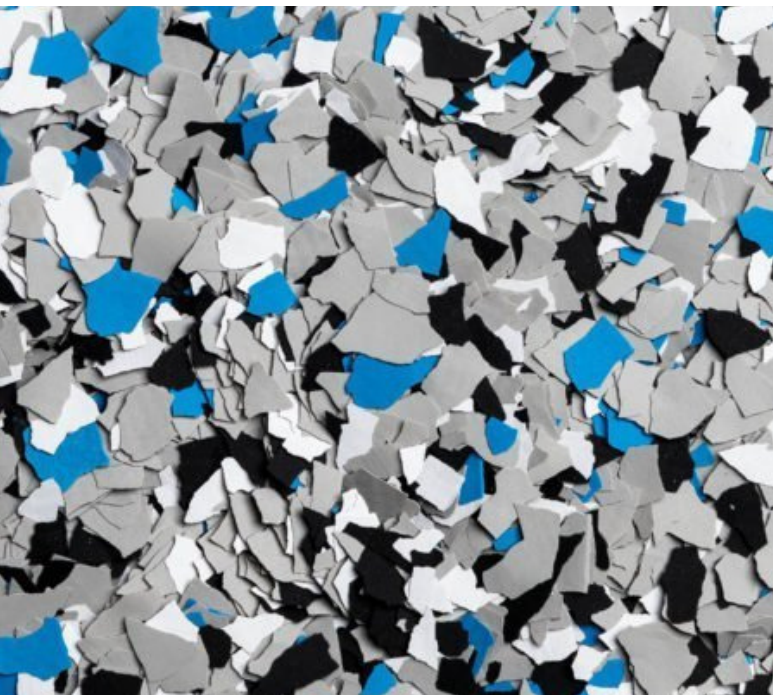

1

**EPARENCY POLYASPARTIC
COATING**

2

**EPARENCY EPOXY FLOOR
COATING**

3

**EPARENCY WATER BASED
ACRYLIC COATING**

4

**EPARENCY PEELABLE
COATING**

5

**EPARENCY BOOTH
COATING**



PolyAspartic Coating

TOUGH COATING

We protect the concrete tasked with withstanding the toughest jobs in the toughest Australian environments.

When properly installed, Eparency Polyaspartic Coatings is designed to provide protection to the most challenging concrete slabs. This nonflammable, low odor, non-blushing formulation requires no solvent wiping or sand broadcasting. Eparency Coatings is formulated to be effective in blocking the surface alkalinity of concrete slabs, providing a surface pH level of 9 or lower, as recommended by the Australian Carpet Institute, making it ideal for bonding with most adhesives.

FEATURES OF EPARENCY POLYASPARTIC:

Eparency polyaspartic coating comes with two kits, one epoxy primer and one polyaspartic top coating.

100% UV stable, never have to worry about discoloring. Suitable for clear coating and exterior/interior use.

Longer pot life compare with epoxy coating due to low exothermic curing process.

Pot life (100ml mix): 2hrs

Curing time to reach touch dry (60% RH, 25°C, 0.3mm coating thickness): 4hrs

Curing time to reach complete dry for traffic use: 48hrs



Epoxy Coating

100% SOLIDS SELF-LEVELING EPOXIES PRIMER/FINISH

Eparency Epoxy Floor Coating is a commercial grade high performance coating system. You don't need primer, coating and then top coat. This Eparency epoxy coating is the all-in-one formula which is ideal for home and commercial use. This single layer coating provides you with a durable floor that withstands cleaners, chemicals, engine fluid, transmission liquid, etc. It finishes with an easy to clean surface. This coating is ideal for garages, warehouses and other flooring that is concrete based. Eparency epoxy floor coating is a great option if you are looking for tough and attractive flooring.

FEATURES OF EPARENCY EPOXY FLOOR COATING:

- Provide a more durable surface
- Make the floor easy-to-clean
- Versatile to be used for both residential and commercial project
- Zero VOC
- Non-Flammable
- 100% solids
- Recommended mixing volume: 4-10 litres
- Pot life: 5 minutes
- COVERAGE**
- Approximately 200-500ml per square metre. Coverage will vary based upon substrate condition, including concrete surface profiles as well as wood subfloors and the number of coats required.



Acrylic Coating

WATER BASED ONE PART NO MIXING ACRYLIC

Eparency water based coating is 100% water based food grade coating. This product is one part, no mixing required, ready to apply. Coated flooring with Eparency could last for many years with light traffic. Scratch or crack can be easily fixed by sealing it with the same Eparency water based coating. Eparency water based coating can be coated over as many times as necessary. The original product dries clear, and it can be easily tinted into any colors with Eparency color paste. Eparency water based coating is 100% UV stable and will not discolor under harsh Australian environment.

FEATURES OF EPARENCY ACRYLIC COATING:

- One part
- Easy to apply
- Versatile to be used for both residential and commercial project
- Zero VOC
- Water based No harsh chemical

COVERAGE

Approximately 300-800ml per square metre. Do not cover over 800ml/sqm. Coverage will vary based upon substrate condition, including concrete surface profiles as well as wood subfloors and the number of coats required.



Peelable Coating

TEMP COATING - PEEL AWAY ANY TIME

Eparency peelable coating is a water based two parts coating system for peelable/removable industrial/household floor coating. Eparency peelable coating product consists a primer and a top coat. Both are water based and non toxic, and one part solution so no mixing is needed. Eparency peelable coating is easy to apply, just like applying paint. The coating can be peeled off when needed.

INSTRUCTION OF EPARENCY ACRYLIC COATING:

1. Thoroughly clean the concrete floor. Prepare to be coated.
2. Use brush or roller to spread primer onto the concrete. The coating thickness must be over 2mm.
3. Wait till the Eparency primer is fully dried. Coat another layer if necessary.
4. Once primer is completely dried. Use clean brush or roller to coat the Eparency topcoat. Make sure the thickness is under 1mm. Thinner coat might wear quicker.
5. Wait till the topcoat completely dry for 7 days before use.

Booth Coating

Removable by Water

100% Water Based



1 Litre



EPARENCY

Booth Coating

EPARENCY BOOTH COATING/WATER SOLUBLE COATING

Eparency Booth Coating is ready for use and dries as a clear anti-dust control and protectant, suitable for use on the walls, ceilings, light fittings, glass etc in any spray booth. Eparency's excellent solvent resistance can be used as a masking barrier for solvent based paints and collection of overspray.

This Eparency transparent liquid booth coating that can be applied by brush, roller or spray gun – and easily removed by either peeling off or washing off with water.

INSTRUCTION OF EPARENCY BOOTH COATING:

- Apply by brush or conventional spray gun at 40 to 50 psi with a minimum 2.5mm set up.
- First coat should be touch dry before applying second coat. Extra coats are recommended if you intend to peel product off.
- Allow second coat of Eparency to dry overnight.

(If thinning is required, use water to dilute)